

SPECIFICATION SHEET

LUNALUX

Watt
5/7

IP
65

CRI
80

BEAM
38°

120
Lm/W

Mains
240V



@GAPLIGHTINGLTD
GAP LIGHTING LTD
/GAPLIGHTINGLTD
GAP LIGHTING LTD



PRODUCT FEATURES

- Architectural recessed fire-rated downlighter
- Fixed design
- Low glare light output
- Various bezel colours
- Fire-rated 30 | 60 | 90 minutes
- CCT-4 Switchable
- Wattage selectable 5W-7W
- IP65 Protection
- Matt white
- Easy lamp change
- Low profile ideal for shallow ceiling spaces

INSTALLATION

Bezel Options:



BLACK
BEZEL

CHROME
BEZEL

NICKEL
BEZEL

PRODUCT CODE


DLX-120

PRODUCT DESCRIPTION

CCT-4 colour tunable, dimmable, integrated fire-rated LED downlight with advanced thermal design. Adjustable white colour temperature and quick fit magnetic bezels available.

PRODUCT DATA

MODEL	DLX-120
WATTAGE	5W-7W Switchable
LUMINOUS FLUX	120Lm per Watt
PROTECTION	IP65
IK	07
CRI	>80
UGR	<25
ENERGY RATING	E
CCT	CCT-4 Switchable 2700K-3000K-4000K-5700K
INPUT	240V
DIMMABLE	✓ (Trailing edge & leading edge)
MATERIAL	Aluminium Polycarbonate
BEAM ANGLE	38°
DIMENSIONS	Dia 85mm H 32mm
CUT OUT	68-75mm
BEZEL SIZE	Dia 85mm H 10mm
WORKING TEMP.	-20 - 40°C
LIFE	>30,000 hours
PACKAGING	Cardboard box
WEIGHT	7.5kg
GUARANTEE	3 years
APPROVALS	CE ROHS



CCT4
Switchable


5W-7W
Switchable

INSTALLATION GUIDE

DLX-120

Thank you for purchasing a GAP LIGHTING product.
Please be assured that all of our products are CE, ROHS and UKCA approved.

Please ensure that this product is installed by a qualified electrician and in accordance with the latest wiring and building regulations.

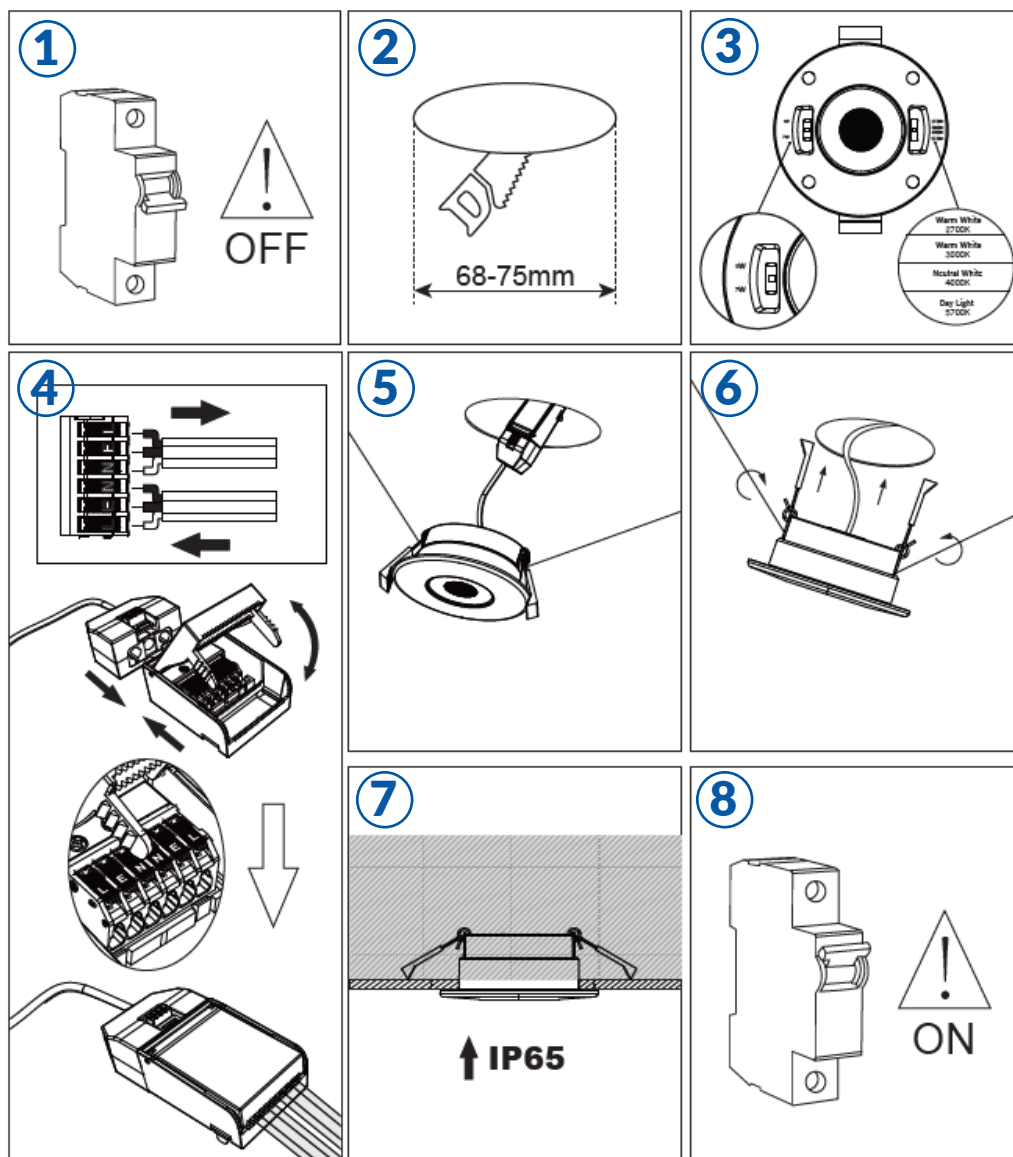

For more information or technical guidance, please contact our head office.