SPECIFICATION SHEET


GLX103

IK 07 | IP 67 | CRI 80

BEAM 30° | Lm 150 | Mains 240V

GAP LIGHTING
SMART LED SOLUTIONS

@GAPLIGHTINGLTD
GAP LIGHTING LTD
/GAPLIGHTINGLTD
GAP LIGHTING LTD

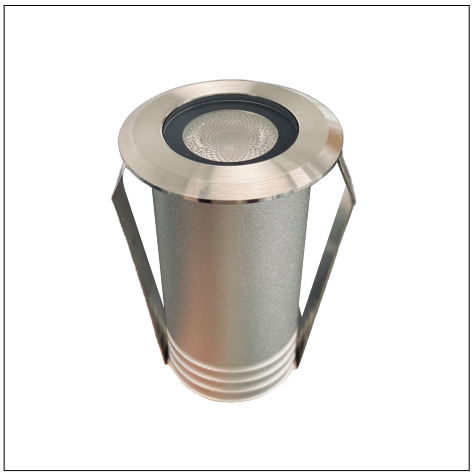

PRODUCT FEATURES

Solid state recessed LED groundlight

240V direct to mains

Highly efficient CREE technology

Single colour white 6000K

IP67 Protection

High grade aluminium housing

Stainless steel 316 bezel

Prismatic glass lens

Easy and convenient install

Complete with 1M of cable

Installation sleeve available

INSTALLATION



IMPORTANT: It is very important that adequate drainage is allowed when installing this product and for all solid in-ground installations we recommend that you select from our SS316 IP68 range. GLX103 is not suitable for wall installations.

TS103

SMART CONTROL



T-IDIM + T-RGB-CCT

PRODUCT CODE

GLX103-W

PRODUCT DESCRIPTION

The latest addition to our recessed groundlight series, GLX103 is a highly manufactured 240V LED fixture with all the benefits of a driverless direct to mains install and the added features of CREE technology and SS316 bezel. Ideal for diverse exterior and interior applications.

PRODUCT DATA

MODEL	GLX103-W
LED BRAND	CREE
LED TYPE	Integrated LED
WATTAGE	2W
LUMINOUS FLUX	150 Lm
PROTECTION	IP67
CRI	80
IK	07
ENERGY RATING	G
KELVIN	White 6000K
INPUT	240V
DIMMABLE	✓ (Triac dimmable or iDIM + T-RGB-CCT RF remote)
MATERIAL	High-grade aluminium housing
LENS	Tempered glass
BEZEL	Chrome finish | Stainless steel 316
BEAM ANGLE	30° | 45° | 80°
WORKING TEMP.	-20 - 45°C
DIMENSIONS	Dia 45mm | H 80mm
CUTOUT	38mm
LIFE	>30,000 hours
CABLE	1m 2-core flex
SLEEVE	TS103 - D 40mm | H 150mm
PACKAGING	Cardboard box
WEIGHT	0.3 kg
GUARANTEE	3 years
APPROVALS	CE | ROHS

GLX103

IK 07 | IP 67 | CRI 80

BEAM 30° | Lm 150 | Mains 240V

GAP LIGHTING
SMART LED SOLUTIONS

@GAPLIGHTINGLTD
GAP LIGHTING LTD
/GAPLIGHTINGLTD
GAP LIGHTING LTD

INSTALLATION GUIDE

GLX103-W

Thank you for purchasing a GAP LIGHTING product.
Please be assured that all of our products are CE, ROHS and UKCA approved.

Please ensure that this product is installed by a qualified electrician and in accordance with the latest wiring and building regulations.

Preparation

Before drilling the holes and running any wiring, please plan how you wish to install these ground lights within the desired location. Ensure all the leads reach and that the mains connection is positioned indoors or in a suitable weatherproof housing. Lastly, always ensure mains supply is isolated before carrying out installation or maintenance.


We strongly recommend that you test this product prior to installation to ensure that this is the correct product for your requirements and suitable for your location.


Installation

1. Provide a 3-core mains supply to each ground light position.
2. Install the installation tube where appropriate.
3. A suitable waterproof junction box or enclosure must be used to maintain the IP rating of the product.
4. Push fitting into installation sleeve.
5. Ensure polarity is correct before testing as this may damage the product.

If you are installing this product into hard ground, you must allow for adequate drainage.
Plan to dig a hole at least 12 inches (30cm) deep below the light fitting, and fill with shingle | gravel.
It is good practice to test the drainage and ensure that water drains freely.

This product has a 316 marine grade stainless steel bezel. Whilst it is corrosion resistant, it is not corrosion proof. Please maintain the product using a non abrasive cloth together with fresh water and a mild detergent every few months.

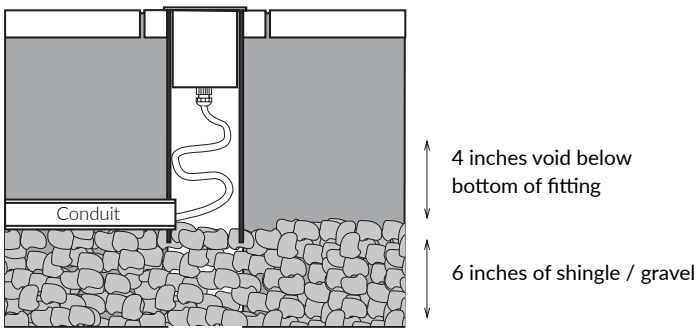

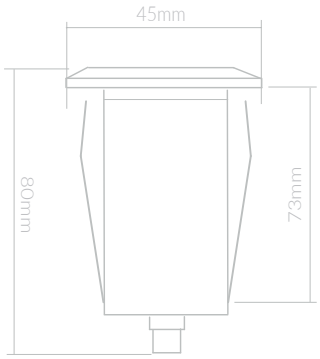

For more information or technical guidance, please contact our head office.