info@gaplighting.co.uk +44 1322 620 100 www.gaplighting.co.uk

TECHNICAL DATA

Exterior Lighting

PRODUCT CODE

GLX24

WARRANTY


1 year guarantee

@GAPLightingLtd
GAP Lighting Ltd
/GAPLightingLtd
GAP Lighting Ltd




PRODUCT DESCRIPTION

GLX24 is the latest in our SMART SYNC collection and a unique addition to our extensive ground light series. RF wireless technology and a spectrum of RGBCCT tunable colours including adjustable white temperature 2700k - 6400k make this fi xture a perfect solution for diverse in-ground applications.



TS106 available

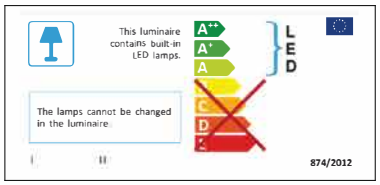

PRODUCT FEATURES

- RGBCCT 24V robust LED ground light
- Supreme quality aluminium housing
- Stainless steel 316 screwless bezel
- IP68 Protection
- Opaque tempered glass lens
- Low glare light output
- Tunable white temperature 2700K - 6500K
- Multi RGB colour changing options
- SMART SYNC or control independently

PRODUCT DATA

Model	GLX24
LED Brand	EPISTAR
Power	2W
Luminous Flux	300Lm
Protection	IP68
Colour	RGBCCT
CRI	>90
Input	24V
Material	Stainless steel housing
Lens	Tempered prismatic glass
Beam Angle	120°
Life	>30,000 hours
Dimensions	Dia 63mm | H 69mm
Cut out	47mm
Cable	2m rubber cable
Approvals	CE | ROHS

INSTALLATION

Please follow installation guide
TS106 installation sleeve is available
for solid ground applications.
D:55mm x 150mm

Please allow adequate drainage when installing this product outside.
Not suitable for solid in-ground installations. IP68 protection is recommended.

