JOHN CULLEN

CAZALLA

MINIATURE LOW GLARE FLOOR AND STEP LIGHT

LUMINAIRE REF:

PROJECT REF:



The Cazalla is a compact, energy-efficient LED steplight delivering soft, low-glare illumination to stair treads, corridors and exterior pathways. Its refined optical control ensures visual comfort in both residential and hospitality settings.

Exceptionally versatile, Cazalla can also be installed inverted at high level to function as a discreet uplight. Suitable for interior, exterior and wet-area applications.



BRIGHT CHROME



BRONZE



BLACK RAL 9005




STAINLESS STEEL



WHITE RAL 9910



PRIMED





FLOOR WASH

ACCESSORIES



IP66 ENCLOSURE FOR DRIVER LARGE
ACENIPLRG



IP66 ENCLOSURE FOR DRIVER SMALL
ACENIPSML



INSTALLATION SLEEVE
ACISCAZA2

3 YEAR WARRANTY

WWW.JOHNCULLENLIGHTING.COM
UK +44 (0) 20 7371 9000 | Middle East & APAC +971 (0) 4 321 114
Europe +33 (0)9 61 68 22 81 | US +1 469 657 4791

© John Cullen Lighting 2026. Technical data figures are for guidance only and are subject to ±5% tolerance
We reserve the right to change the design and specification of our product range without prior notice. E&OE

CE PART L COMPLIANT BRITISH DESIGN UK CA

JOHN CULLEN


CAZALLA

MINIATURE LOW GLARE FLOOR AND STEP LIGHT

LUMINAIRE REF:

PROJECT REF:

SPECIFICATION	FLOOR WASH
BEAM ANGLE (°)	FLOOR WASH
DRIVE CURRENT (mA)	700MA
FORWARD VOLTAGE (V DC)	3.2V DC
POWER CONSUMPTION (W)	2W
LIGHT SOURCE LUMENS (LM)	187
LIGHT SOURCE EFFICACY (LM/W)	94
LUMINAIRE LUMENS (LM)	46 LM
LUMINAIRE EFFICACY (LM/W)	23 LM/W
INTENSITY RATING (CD)	26
PART L1 DWELLINGS	YES
PART L2 NON DWELL (DISPLAY)	YES
PART L2 NON DWELL (GENERAL)	NO
MAX TEMPERATURE (°C)	N/A

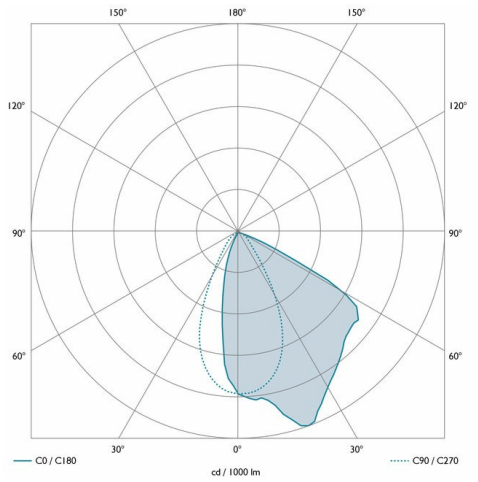



INGRESS RATING	IP66
IMPACT RATING	IK03
COMPLIANCE	IEC/EN 60598-1:2015
	IEC/EN 60598-2-2:2012

COLOUR TEMPERATURE	2700K
CIE CRI AVAILABLE AS	98 Ra
IES TM-30 COLOUR FIDELITY (Rf)	95.8
IES TM-30 COLOUR GAMUT (Rg)	100.4
BINNING	2 SDCM (Equivalent)
LIFETIME L70/B10 (HOURS)	>50000
AMBIENT TEMPERATURE (Ta)	-20 ... +40 °C

ELECTRICAL	
SOURCE TYPE	LED
PRODUCT CLASS	Class III (SELV low voltage)
DIMMING PROTOCOL	0-10V dimmable
	DALI dimmable
	Mains dimmable (phase cut dimming)
	Switched

OTHER DATA	
CABLE TYPE	2 Core PVC (Copper Strands)
CABLE SIZE	4mm OD - 2 off 7/0.2 (0.22mm2)
CABLE LENGTH	300mm
CONNECTOR TYPE	N/A
WEIGHT	70g
FIRE RATED	N/A

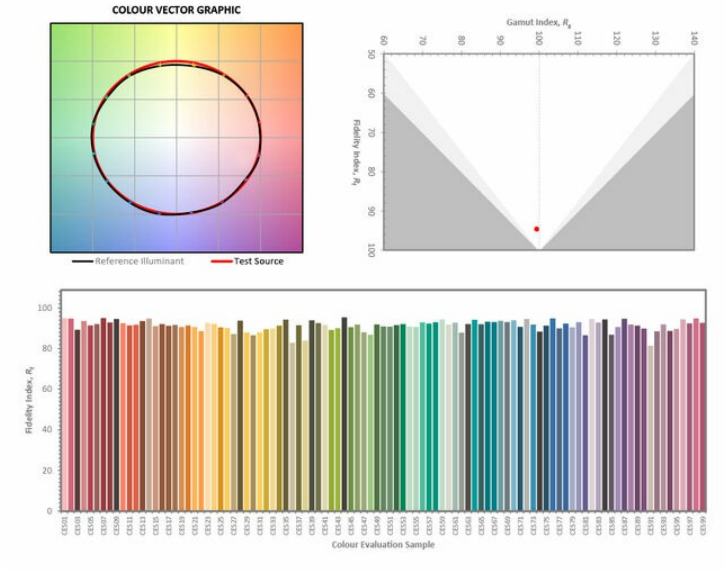

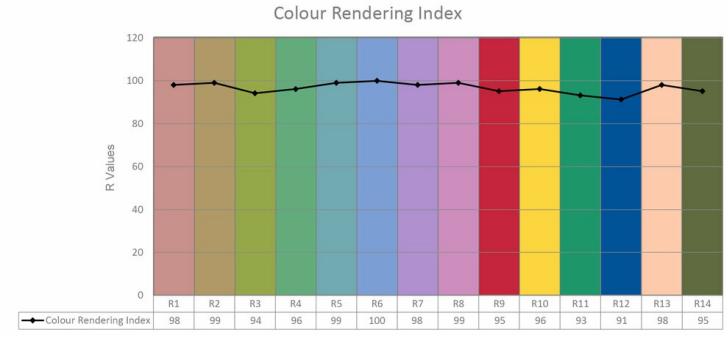

3 YEAR WARRANTY

WWW.JOHNCULLENLIGHTING.COM
UK +44 (0) 20 7371 9000 | Middle East & APAC +971 (0) 4 321 114
Europe +33 (0)9 61 68 22 81 | US +1 469 657 4791

© John Cullen Lighting 2026. Technical data figures are for guidance only and are subject to ±5% tolerance
We reserve the right to change the design and specification of our product range without prior notice. E&OE

CE PART L COMPLIANT BRITISH DESIGN UK CA