JOHN CULLEN

GUIDA

LOW PROFILE INDICATOR LIGHT - SINGLE/DOUBLE FACET

LUMINAIRE REF:

PROJECT REF:



Guida is a low-profile exterior in-ground LED indicator light, producing a controlled, low-glare wash across the ground. Ideal for landscape and marine environments, it discreetly defines pathways, steps and deck edges.


Available in single or double facet configurations, Guida allows precise control of light direction to suit the application.




NAVAL BRASS




STAINLESS STEEL





FLOOR WASH



DOUBLE FLOORWASH

ACCESSORIES



IP66 ENCLOSURE FOR DRIVER LARGE
ACENIPLRG



IP66 ENCLOSURE FOR DRIVER SMALL
ACENIPSML

3 YEAR WARRANTY

WWW.JOHNCULLENLIGHTING.COM
UK +44 (0) 20 7371 9000 | Middle East & APAC +971 (0) 4 321 114
Europe +33 (0)9 61 68 22 81 | US +1 469 657 4791

© John Cullen Lighting 2026. Technical data figures are for guidance only and are subject to ±5% tolerance
We reserve the right to change the design and specification of our product range without prior notice. E&OE

CE PART L COMPLIANT BRITISH DESIGN UK CA

JOHN CULLEN


GUIDA

LOW PROFILE INDICATOR LIGHT - SINGLE/DOUBLE FACET

LUMINAIRE REF:

PROJECT REF:

SPECIFICATION	FLOOR WASH	DOUBLE FLOORWASH
BEAM ANGLE (°)	68° X 21°	71° X 47.5°
DRIVE CURRENT (mA)	350MA	350MA
FORWARD VOLTAGE (V DC)	2.7V DC	2.7V DC
POWER CONSUMPTION (W)	1W	1W
LIGHT SOURCE LUMENS (LM)	90	90
LIGHT SOURCE EFFICACY (LM/W)	90	90
LUMINAIRE LUMENS (LM)	10 LM	20 LM
LUMINAIRE EFFICACY (LM/W)	10 LM/W	20 LM/W
INTENSITY RATING (CD)	16	32
PART L1 DWELLINGS	YES	YES
PART L2 NON DWELL (DISPLAY)	YES	YES
PART L2 NON DWELL (GENERAL)	NO	NO
MAX TEMPERATURE (°C)	N/A	N/A

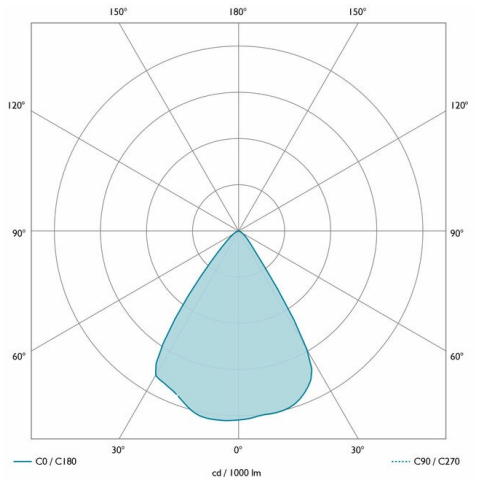



INGRESS RATING	IP67
IMPACT RATING	IK20
COMPLIANCE	IEC/EN 60598-1:2015
	IEC/EN 60598-2-2:2012
	IEC/EN 60598-2-13:2006

COLOUR TEMPERATURE	2700K
CIE CRI AVAILABLE AS	98 Ra
IES TM-30 COLOUR FIDELITY (Rf)	94.9
IES TM-30 COLOUR GAMUT (Rg)	98.7
BINNING	2 SDCM (Equivalent)
LIFETIME L70/B10 (HOURS)	>50000
AMBIENT TEMPERATURE (Ta)	-20 ... +40 °C

ELECTRICAL	
SOURCE TYPE	LED
PRODUCT CLASS	Class III (SELV low voltage)
DIMMING PROTOCOL	0-10V dimmable
	DALI dimmable
	Mains dimmable (phase cut dimming)
	Switched

OTHER DATA	
CABLE TYPE	2 Core Silicone (180 °C)
CABLE SIZE	6.4mm OD - 2 off 24/0.2 (0.75mm2)
CABLE LENGTH	5000mm
CONNECTOR TYPE	N/A
WEIGHT	2200g
FIRE RATED	N/A

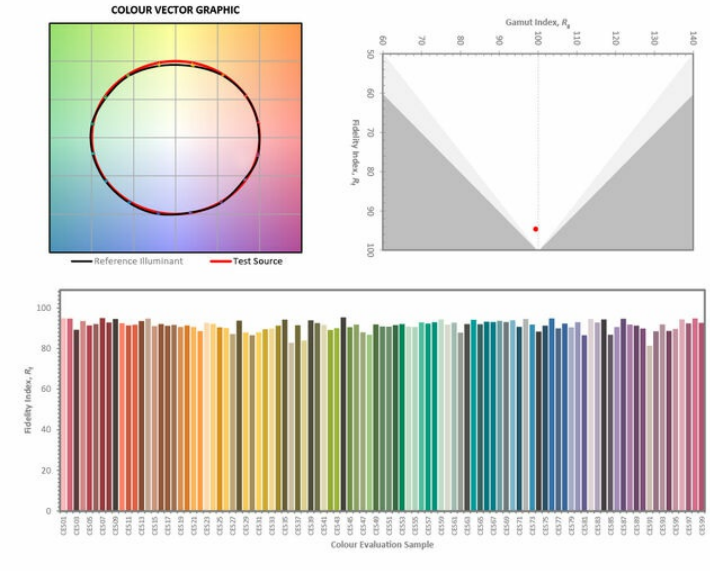

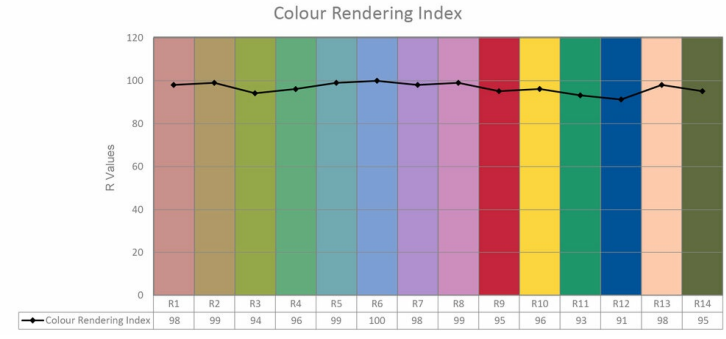

3 YEAR WARRANTY

WWW.JOHNCULLENLIGHTING.COM
UK +44 (0) 20 7371 9000 | Middle East & APAC +971 (0) 4 321 114
Europe +33 (0)9 61 68 22 81 | US +1 469 657 4791

© John Cullen Lighting 2026. Technical data figures are for guidance only and are subject to ±5% tolerance
We reserve the right to change the design and specification of our product range without prior notice. E&OE

CE PART L COMPLIANT BRITISH DESIGN UK CA