JOHN CULLEN

HAMPTON 25 SPIKE 2027

MINIATURE SPIKE-MOUNTED ADJUSTABLE FLOODLIGHT

LUMINAIRE REF:

PROJECT REF:




The Hampton 25 is a compact spike-mounted exterior floodlight, ideal for gently lighting pathways, planting and small shrubs. Its discreet form and finish ensures the fitting disappears into the landscape, leaving only the lighting effect visible.

Mounted on a discreet spike, Hampton 25 can be easily repositioned as planting evolves. The controlled flood distribution delivers even coverage without visual intrusion.

Rated IP66, the 2027 fitting is engineered for greater exterior durability and sustainability. New e-coating and powder-coated metalwork provides enhanced protection against corrosion, making it suitable for use in coastal environments with appropriate maintenance. Now with an extended 5 year warranty.



RAL 6003 FINE TEXTURE





FLOOD

ACCESSORIES



IP66 ENCLOSURE FOR DRIVER LARGE
ACENIPLRG



IP66 ENCLOSURE FOR DRIVER SMALL
ACENIPSML

5 YEAR WARRANTY

WWW.JOHNCULLENLIGHTING.COM
UK +44 (0) 20 7371 9000 | Middle East & APAC +971 (0) 4 321 114
Europe +33 (0)9 61 68 22 81 | US +1 469 657 4791

© John Cullen Lighting 2026. Technical data figures are for guidance only and are subject to ±5% tolerance
We reserve the right to change the design and specification of our product range without prior notice. E&OE

CE PART L COMPLIANT BRITISH DESIGN UK CA

JOHN CULLEN

HAMPTON 25 SPIKE 2027

MINIATURE SPIKE-MOUNTED ADJUSTABLE FLOODLIGHT

LUMINAIRE REF:

PROJECT REF:


SPECIFICATION	FLOOD
BEAM ANGLE (°)	109°
DRIVE CURRENT (mA)	500
FORWARD VOLTAGE (V DC)	3
POWER CONSUMPTION (W)	1.5
LIGHT SOURCE LUMENS (LM)	160
LIGHT SOURCE EFFICACY (LM/W)	107
LUMINAIRE LUMENS (LM)	N/A
LUMINAIRE EFFICACY (LM/W)	N/A
INTENSITY RATING (CD)	N/A
PART L1 DWELLINGS	YES
PART L2 NON DWELL (DISPLAY)	YES
PART L2 NON DWELL (GENERAL)	NO
MAX TEMPERATURE (°C)	N/A


INGRESS RATING	IP66
IMPACT RATING	N/A
COMPLIANCE	BS EN IEC 60598-1:2014
	IEC 60598-2-7:1982/AMD1:1987/AMD2:1994

COLOUR TEMPERATURE	2700K
CIE CRI AVAILABLE AS	98 Ra
IES TM-30 COLOUR FIDELITY (Rf)	94.3
IES TM-30 COLOUR GAMUT (Rg)	98.1
BINNING	2 SDCM (Equivalent)
LIFETIME L70/B10 (HOURS)	>50000
AMBIENT TEMPERATURE (Ta)	-20 ... +40 °C

ELECTRICAL	
SOURCE TYPE	LED
PRODUCT CLASS	Class III (SELV low voltage)
DIMMING PROTOCOL	0-10V dimmable
	DALI dimmable
	Mains dimmable (phase cut dimming)
	Switched

OTHER DATA	
CABLE TYPE	2 Core Silicone (180°C)
CABLE SIZE	6.4mm OD - 2 off 24/0.2 (0.75mm2)
CABLE LENGTH	2600mm
CONNECTOR TYPE	IP67 Connector Box Included
WEIGHT	60g
FIRE RATED	N/A

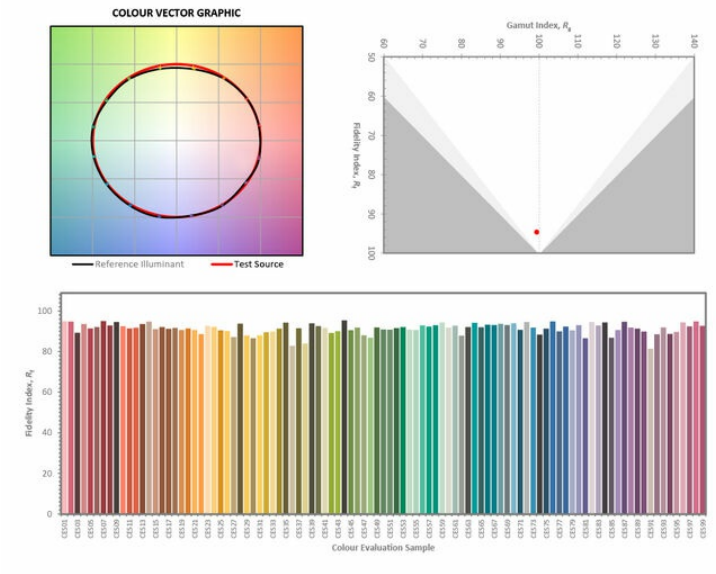

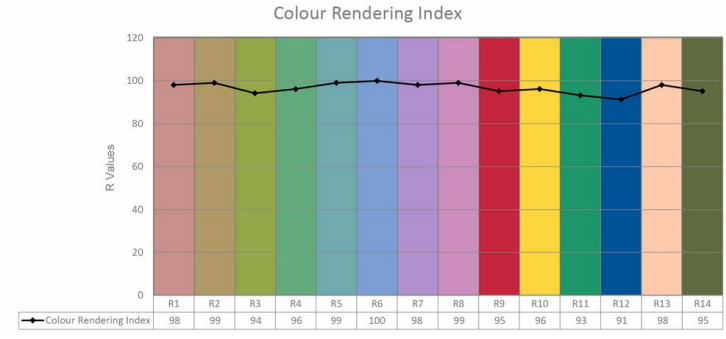

5 YEAR WARRANTY

WWW.JOHNCULLENLIGHTING.COM
UK +44 (0) 20 7371 9000 | Middle East & APAC +971 (0) 4 321 114
Europe +33 (0)9 61 68 22 81 | US +1 469 657 4791

© John Cullen Lighting 2026. Technical data figures are for guidance only and are subject to ±5% tolerance
We reserve the right to change the design and specification of our product range without prior notice. E&OE

CE PART L COMPLIANT BRITISH DESIGN UK CA