JOHN CULLEN

# LUCCA 60

## MIDI UPLIGHT FOR ARCHITECTURAL LIGHTING

LUMINAIRE REF:

PROJECT REF:



The Lucca 60 is an energy-efficient LED midi uplight designed to create striking vertical illumination for columns, arches, window reveals, walls and trees. A comprehensive range of beam distribution including narrow, medium, wide, elliptical and asymmetric allows precise shaping of light for grazing and washing applications.

Rated IP67, Lucca 60 is suitable for both interior and exterior use. Interior installations benefit from an extended five-year warranty. Supplied with 1 metre of cable as standard, with custom lengths available.



WHITE RAL 9910



BLACK ANODISED




BRASS



BRONZE ANODISED



STAINLESS STEEL

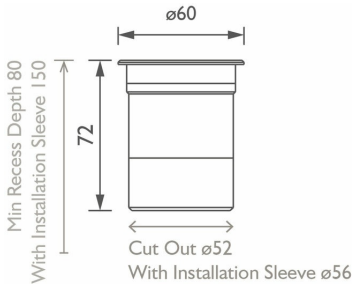





ASYMMETRIC



ELLIPTICAL



NARROW



MEDIUM



WIDE

## ACCESSORIES



IP66 ENCLOSURE FOR DRIVER LARGE
ACENIPLRG



IP66 ENCLOSURE FOR DRIVER SMALL
ACENIPSML



LUCCA 60 TRIM BURIAL SLEEVE
ACL6TRS1

3 YEAR WARRANTY

WWW.JOHNCULLENLIGHTING.COM
UK +44 (0) 20 7371 9000 | Middle East & APAC +971 (0) 4 321 114
Europe +33 (0)9 61 68 22 81 | US +1 469 657 4791

© John Cullen Lighting 2026. Technical data figures are for guidance only and are subject to ±5% tolerance
We reserve the right to change the design and specification of our product range without prior notice. E&OE

CE PART L COMPLIANT BRITISH DESIGN UK CA

JOHN CULLEN


# LUCCA 60

## MIDI UPLIGHT FOR ARCHITECTURAL LIGHTING

**LUMINAIRE REF:**

**PROJECT REF:**

| SPECIFICATION | ASYMMETRIC | ELLIPTICAL | NARROW | MEDIUM | WIDE |
|---|---|---|---|---|---|
| BEAM ANGLE (°) | ASYMMETRIC | ELLIPTICAL | 18° | 24° | 36° |
| DRIVE CURRENT (mA) | 500MA | 500MA | 500MA | 500MA | 500MA |
| FORWARD VOLTAGE (V DC) | 12V DC | 12V DC | 12V DC | 12V DC | 12V DC |
| POWER CONSUMPTION (W) | 6W | 6W | 6W | 6W | 6W |
| LIGHT SOURCE LUMENS (LM) | 516 | 516 | 516 | 516 | 516 |
| LIGHT SOURCE EFFICACY (LM/W) | 86 | 86 | 86 | 86 | 86 |
| LUMINAIRE LUMENS (LM) | N/A | 262 LM | 368 LM | 351 LM | 225 LM |
| LUMINAIRE EFFICACY (LM/W) | N/A | 44 LM/W | 61.3 LM/W | 58.5 LM/W | 37.5 LM/W |
| INTENSITY RATING (CD) | N/A | 1021 | 2923 | 1705 | 653 |
| PART L1 DWELLINGS | YES | YES | YES | YES | YES |
| PART L2 NON DWELL (DISPLAY) | YES | YES | YES | YES | YES |
| PART L2 NON DWELL (GENERAL) | NO | NO | NO | NO | NO |
| MAX TEMPERATURE (°C) | N/A | N/A | N/A | N/A | N/A |

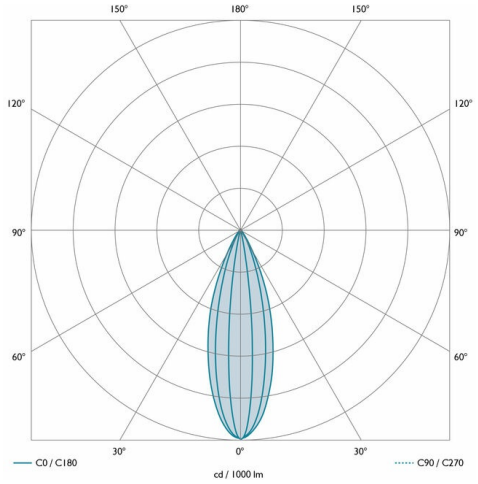



| | |
|---|---|
| INGRESS RATING | IP67 |
| IMPACT RATING | IK10 |
| COMPLIANCE | IEC/EN 60598-1:2015 |
| | IEC/EN 60598-2-2:2012 |
| | IEC/EN 60598-2-13:2006 |
| | |

| | |
|---|---|
| COLOUR TEMPERATURE | 2700K |
| CIE CRI AVAILABLE AS | >90 Ra |
| IES TM-30 COLOUR FIDELITY (Rf) | >90 |
| IES TM-30 COLOUR GAMUT (Rg) | >95 |
| BINNING | 2 SDCM |
| LIFETIME L70/B10 (HOURS) | >50000 |
| AMBIENT TEMPERATURE (Ta) | -20 ... +40 °C |

| ELECTRICAL | |
|---|---|
| SOURCE TYPE | LED |
| PRODUCT CLASS | Class III (SELV low voltage) |
| DIMMING PROTOCOL | 0-10V dimmable |
| | DALI dimmable |
| | Mains dimmable (phase cut dimming) |
| | Switched |

| OTHER DATA | |
|---|---|
| CABLE TYPE | 2 Core Silicone (180 °C) |
| CABLE SIZE | 2 off 7/0.2 (0.22mm2) |
| CABLE LENGTH | 1000mm |
| CONNECTOR TYPE | N/A |
| WEIGHT | N/A |
| FIRE RATED | N/A |

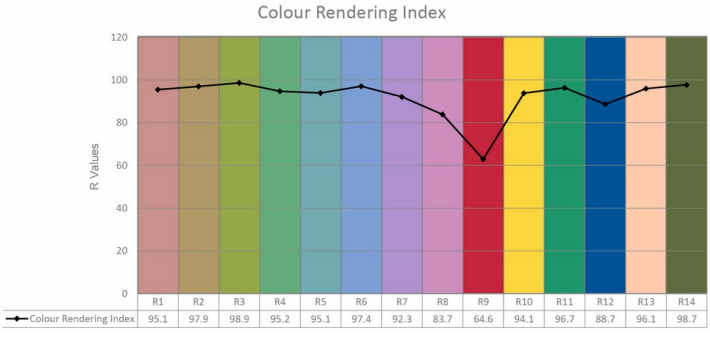


3 YEAR WARRANTY

WWW.JOHNCULLENLIGHTING.COM
UK +44 (0) 20 7371 9000 | Middle East & APAC +971 (0) 4 321 114
Europe +33 (0)9 61 68 22 81 | US +1 469 657 4791

© John Cullen Lighting 2026. Technical data figures are for guidance only and are subject to ±5% tolerance
We reserve the right to change the design and specification of our product range without prior notice. E&OE

CE PART L COMPLIANT BRITISH DESIGN UK CA