JOHN CULLEN

PORTOBELLO

DECORATIVE PATHWAY AND PLANT SPIKE LIGHT

LUMINAIRE REF:

PROJECT REF:



Product Image

BLACK RAL 9005

Product Image

ALUMINIUM


Portobello is a discreet spiked garden/yard luminaire designed to gently illuminate foliage and low-level planting with a radiant 360° wash of light. Its distinctive mushroom-inspired form delivers warm, low-glare illumination while visually disappearing into the landscape, creating a subtle, almost magical garden effect.

Designed to evolve with the landscape, the integral spike allows for easy repositioning as planting matures, without the need for reinstallation. Engineered for durability, Portobello performs reliably across extreme temperature ranges and diverse climates.

All metalwork within the garden spike range is pre-treated through an alochroming process prior to powder coating, providing enhanced protection against corrosion — particularly beneficial in coastal environments. Routine maintenance is recommended to ensure long-term performance.



OLIVE GREEN

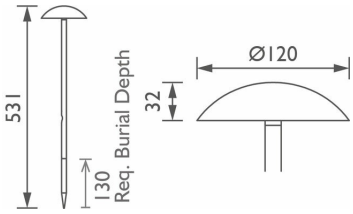



FLOOR WASH

ACCESSORIES



IP66 ENCLOSURE FOR DRIVER LARGE

ACENIPLRG



IP66 ENCLOSURE FOR DRIVER SMALL

ACENIPSML

3 YEAR WARRANTY

WWW.JOHNCULLENLIGHTING.COM
UK +44 (0) 20 7371 9000 | Middle East & APAC +971 (0) 4 321 114
Europe +33 (0)9 61 68 22 81 | US +1 469 657 4791

© John Cullen Lighting 2026. Technical data figures are for guidance only and are subject to ±5% tolerance
We reserve the right to change the design and specification of our product range without prior notice. E&OE

PART L COMPLIANT | BRITISH DESIGN | IK05 | UK CA | DARK SKY

JOHN CULLEN


PORTOBELLO

DECORATIVE PATHWAY AND PLANT SPIKE LIGHT

LUMINAIRE REF:

PROJECT REF:

SPECIFICATION	FLOOR WASH
BEAM ANGLE (°)	FLOOR WASH
DRIVE CURRENT (mA)	700
FORWARD VOLTAGE (V DC)	3.25V DC
POWER CONSUMPTION (W)	2.1W
LIGHT SOURCE LUMENS (LM)	236
LIGHT SOURCE EFFICACY (LM/W)	112
LUMINAIRE LUMENS (LM)	74 LM
LUMINAIRE EFFICACY (LM/W)	35 LM/W
INTENSITY RATING (CD)	N/A
PART L1 DWELLINGS	YES
PART L2 NON DWELL (DISPLAY)	YES
PART L2 NON DWELL (GENERAL)	NO
MAX TEMPERATURE (°C)	N/A

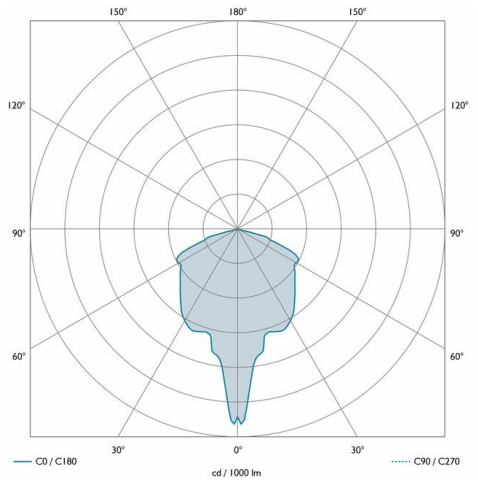

INGRESS RATING	IP65
IMPACT RATING	IK05
COMPLIANCE	IEC/EN 60598-1:2015
	IEC/EN 60598-2-2:2012

COLOUR TEMPERATURE	2700K
CIE CRI AVAILABLE AS	>90 Ra
IES TM-30 COLOUR FIDELITY (Rf)	95
IES TM-30 COLOUR GAMUT (Rg)	>90
BINNING	1/16th ANSI 1931 CIE
LIFETIME L70/B10 (HOURS)	>50000
AMBIENT TEMPERATURE (Ta)	-20 ... +40 °C

ELECTRICAL	
SOURCE TYPE	LED
PRODUCT CLASS	Class III (SELV low voltage)
DIMMING PROTOCOL	0-10V dimmable
	DALI dimmable
	Mains dimmable (phase cut dimming)
	Switched

OTHER DATA	
CABLE TYPE	2 Core Silicone (180 °C)
CABLE SIZE	6.4mm OD - 2 off 24/0.2 (0.75mm2)
CABLE LENGTH	1600mm
CONNECTOR TYPE	N/A
WEIGHT	250g
FIRE RATED	N/A

3 YEAR WARRANTY

WWW.JOHNCULLENLIGHTING.COM
UK +44 (0) 20 7371 9000 | Middle East & APAC +971 (0) 4 321 114
Europe +33 (0)9 61 68 22 81 | US +1 469 657 4791

© John Cullen Lighting 2026. Technical data figures are for guidance only and are subject to ±5% tolerance
We reserve the right to change the design and specification of our product range without prior notice. E&OE

PART L COMPLIANT | BRITISH DESIGN | IK05 | UK CA | DARK SKY