JOHN CULLEN

SQUARE DOUBLE 30

TWIN ARCHITECTURAL DIRECTIONAL MICRO DOWNLIGHT

LUMINAIRE REF:

PROJECT REF:




The Square Double 30 is a miniature double architectural downlight designed to disappear seamlessly into the ceiling. An ultra-slim bezel and deep dual black baffle deliver excellent glare control, while a concealed ceiling ring allows for discreet and effortless lamp changes.

Both light sources can be independently aimed to shape the space with precision. Available in trim/flange and trimless/flangeless versions,and suitable for plasterboard, sheetrock and drywall ceilings, with up to 30° tilt and full 360° rotation.



BLACK RAL 9005

WHITE RAL 9910





NARROW



MEDIUM



WIDE

ACCESSORIES



HONEYCOMB INSERT 23MM
ACHC23MM1

SPREADER LENS 23MM
ACLL23MM1

SANDBLASTED GLASS LENS 23MM
ACSG23MM1

SOFTENING LENS 23MM
ACSL23MM1

5 YEAR WARRANTY

WWW.JOHNCULLENLIGHTING.COM
UK +44 (0) 20 7371 9000 | Middle East & APAC +971 (0) 4 321 114
Europe +33 (0)9 61 68 22 81 | US +1 469 657 4791

© John Cullen Lighting 2026. Technical data figures are for guidance only and are subject to ±5% tolerance
We reserve the right to change the design and specification of our product range without prior notice. E&OE

CE PART L COMPLIANT BRITISH DESIGN cULus UK CA 60

JOHN CULLEN


SQUARE DOUBLE 30

TWIN ARCHITECTURAL DIRECTIONAL MICRO DOWNLIGHT

LUMINAIRE REF:

PROJECT REF:

SPECIFICATION	NARROW	MEDIUM	WIDE
BEAM ANGLE (°)	11°	31°	46°
DRIVE CURRENT (mA)	700MA	350MA	350MA
FORWARD VOLTAGE (V DC)	6.4V DC	24V DC	24V DC
POWER CONSUMPTION (W)	4	8	8
LIGHT SOURCE LUMENS (LM)	344	800	800
LIGHT SOURCE EFFICACY (LM/W)	86	100	100
LUMINAIRE LUMENS (LM)	292	650	480
LUMINAIRE EFFICACY (LM/W)	73	72	62
INTENSITY RATING (CD)	5140	1660	830
PART L1 DWELLINGS	YES	YES	YES
PART L2 NON DWELL (DISPLAY)	YES	YES	YES
PART L2 NON DWELL (GENERAL)	NO	NO	NO
MAX TEMPERATURE (°C)	N/A	N/A	N/A

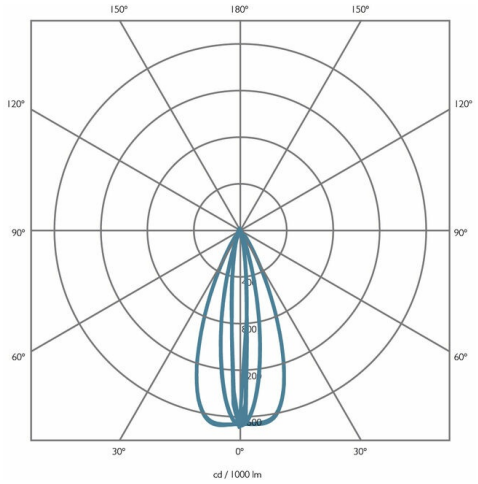



INGRESS RATING	IP20
IMPACT RATING	IK03
COMPLIANCE	IEC/EN 60598-1
	IEC/EN 60598-2-2

COLOUR TEMPERATURE	2700K
CIE CRI AVAILABLE AS	>90 - 98 Ra
IES TM-30 COLOUR FIDELITY (Rf)	>90
IES TM-30 COLOUR GAMUT (Rg)	>95 Ra
BINNING	2 SDCM
LIFETIME L70/B10 (HOURS)	>50000
AMBIENT TEMPERATURE (Ta)	-20 ... +25 °C

ELECTRICAL	
SOURCE TYPE	LED
PRODUCT CLASS	Class III (SELV low voltage)
DIMMING PROTOCOL	0-10V dimmable
	DALI dimmable
	Mains dimmable (phase cut dimming)
	Switched

OTHER DATA	
CABLE TYPE	2 Core Silicone (105°C)
CABLE SIZE	4.1mm OD - 2 off 17/0.15
CABLE LENGTH	300mm
CONNECTOR TYPE	OJ-602B
WEIGHT	N/A
FIRE RATED	Yes

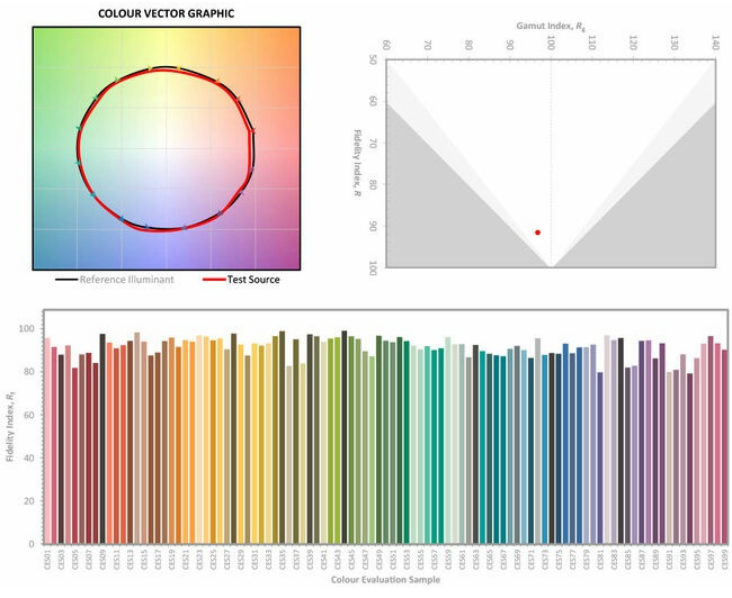

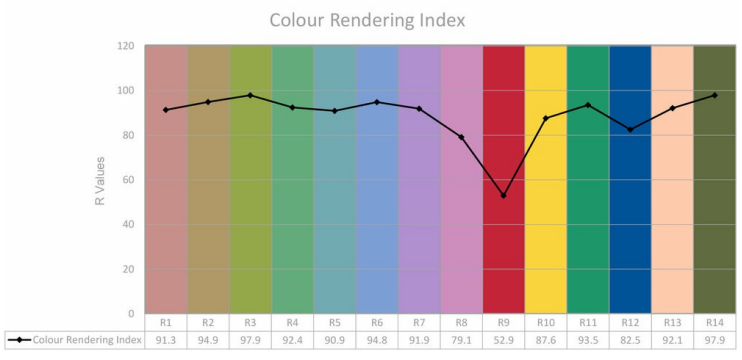

5 YEAR WARRANTY

WWW.JOHNCULLENLIGHTING.COM
UK +44 (0) 20 7371 9000 | Middle East & APAC +971 (0) 4 321 114
Europe +33 (0)9 61 68 22 81 | US +1 469 657 4791

© John Cullen Lighting 2026. Technical data figures are for guidance only and are subject to ±5% tolerance
We reserve the right to change the design and specification of our product range without prior notice. E&OE

CE PART L COMPLIANT BRITISH DESIGN cULus UK CA 60