
Navigator®

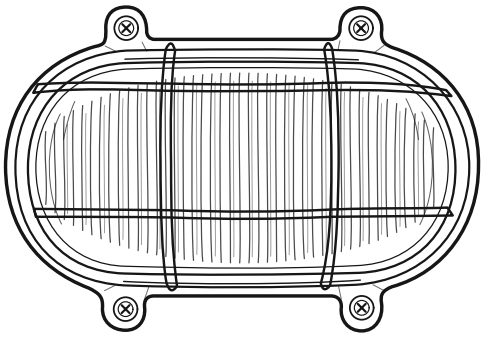

Merchant Flush Bulkhead Installation Guide

Applies to models: 09781, 09782, 09783

Navigator®

Before you begin

Merchant Flush Bulkhead: 09781, 09782, 09783

Check the pack contents and read all safety information before installation.

What's in the pack

Lamp and supply cable not included

- 1 x E27 lampholder
- 2 x Wall-fixing screws
- 2 x Wall plugs
- 2 x Plastic wall-fixing seals
- 2 x Rubber wall-fixing seals
- 2 x Heat-resistant sleeves

Electrical safety

- Isolate the electricity supply. Prevent re-energisation and prove the circuit dead before beginning work. Installation must be carried out by a qualified electrician in accordance with current wiring regulations.
- This is a Class II, double-insulated fitting and does not require an earth connection.
- Replace broken glass immediately and do not operate the fitting with damaged glass or seals.
- Do not exceed the marked maximum wattage.
- Connect to a circuit protected by a 30 mA RCD.

General information

230 V ~ 50 Hz	CLASS II	E27 (ES), max. 18 W	IP64

For fixed wiring only. Use a suitable supply cable sized in accordance with the circuit design and current wiring regulations. This Class II fitting requires live and neutral connections only. Any earth/CPC conductor present in the supply must be safely terminated and must not be connected to the fitting. Supply cable and lamp not included.

Navigator®

Instructions

Merchant Flush Bulkhead: 09781, 09782, 09783

Before beginning installation, read page 2 and isolate the electrical supply.

1 Open the fitting

Isolate the electrical supply. Remove the front guard and glass to expose the rear mounting plate and internal components.

2 Prepare the mounting position

The two wall-fixing positions are marked on the internal rear plate but are not pre-drilled.
Open/drill these two marked fixing positions as required.
Hold the fitting in its intended position and use the rear plate as a template to mark the wall.
Drill the wall and insert the two supplied wall plugs.
Route the supply cable through the rear cable entry.

3 Secure the fitting

Prepare each wall-fixing screw in this order: screw → plastic wall-fixing seal → rubber wall-fixing seal → fitting → wall plug
Secure the rear plate/body to the wall with the two supplied screws. Tighten evenly so the seals are compressed and the fitting is held securely, without over-tightening.

4 Connect the supply

Slide one supplied heat-resistant sleeve over each conductor before making the connections. Connect the brown conductor to Live (L) and the blue conductor to Neutral (N) on the E27 lampholder.
Secure the lampholder to the rear plate using the lampholder fixing screw.

5 Fit the lamp and reassemble

Fit 1 × E27 (ES) lamp, maximum 18 W.
Refit the glass and front guard, checking that all seals are correctly seated. Tighten the retaining screws evenly.

6 Final check and test

Confirm that the fitting, lampholder, glass and guard are secure and that no seals are displaced.
Restore the electrical supply and test the fitting.

Navigator Lighting accepts no responsibility for injury or damage resulting from incorrect installation or use.
If in doubt, consult a qualified electrician.

Please keep these instructions for future reference.

Navigator®

Navigator Lighting

Unit 6 Fen End, Stotfold, Hitchin,

Hertfordshire, SG5 4BA, United Kingdom

Tel: 01462 731173

Email: sales@navigatorlighting.co.uk

navigatorlighting.co.uk

For more information, please scan here

V2.0 | 14.10.2026