orluna

dino adjustable
origin natural




dino adjustable
origin natural

circular product







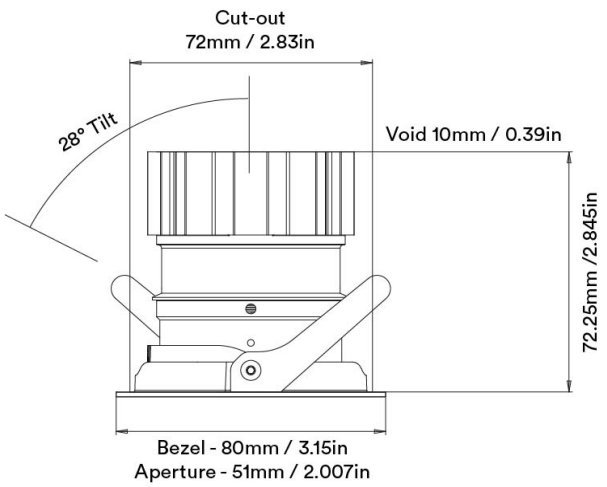

Unit height increases by
21.65mm / 0.85in
for spot and elliptical beams

ORLUNA LED Technologies Limited,
Unit C, Holly Industrial Park,
Ryan Way, Watford,
Hertfordshire WD24 4YP
United Kingdom

info@orluna.com

+44 (0) 1923 889 712

orluna

dino adjustable
origin natural

circular product

1 When an old Orluna light comes to the end of its life, or is faulty, instead of throwing it away, we kindly ask you to return it to us.

2 Once we've received the unwanted or faulty fitting, it's dismantled, repaired and renewed with a new LED and PCB.

3 The fully repaired and tested product enters back into our stock –with a brand new warranty.

4 The 'new' light fitting is despatched to a new customer.







ORLUNA LED Technologies Limited,
Unit C, Holly Industrial Park,
Ryan Way, Watford,
Hertfordshire WD24 4YP
United Kingdom

info@orluna.com

+44 (0) 1923 889 712

orluna

dino adjustable
origin natural

circular product

2700K

	SPOT			SOFT				SPECIALITY		
LIGHT VALUES	Ultra	Spot	Narrow	Medium	Wide	Flood	Wash	Crisp	Elliptical	Elliptical
Beam Width FWHM	8°	10°	14°	26°	42°	50°	58°	36°	10×45°	20×40°
Initial Lumens	533	953	1021	1021	1021	1021	1021	1021	953	953
Engine Lumens	223	357	379	871	859	802	836	861	266	290
Luminaire Lumens	195	351	379	635	650	610	651	691	210	252
Engine Lm/W	29	29	33	76	75	70	73	76	22	24
Luminiare Cd	7065	9911	5797	2068	1172	852	731	1698	768	1414
POWER										
Voltage	36V	36V	34V					36V		
Drive Current	180mA	300mA	300mA					300mA		
Circuit Power (typ)	7.8W	12.2W	11.4W					12.2W		

3000K

	SPOT			SOFT				SPECIALITY		
LIGHT VALUES	Ultra	Spot	Narrow	Medium	Wide	Flood	Wash	Crisp	Elliptical	Elliptical
Beam Width FWHM	8°	10°	14°	26°	42°	50°	58°	35°	10×45°	20×40°
Initial Lumens	637	984	1138	1138	1138	1138	1138	1138	935	935
Engine Lumens	223	368	401	947	944	897	909	943	235	274
Luminaire Lumens	215	359	401	685	715	686	727	762	198	251
Engine Lm/W	29	30	35	83	83	79	80	83	19	22
Luminiare Cd	8274	9755	6702	2271	1327	989	838	1954	744	1408
POWER										
Voltage	36V	36V	34V					36V		
Drive Current	180mA	300mA	300mA					300mA		
Circuit Power (typ)	7.8W	12.2W	11.4W					12.2W		

Binning SDCM (Hot)	2
CRI (typ)(R9)	98 (99)
TM30 Rf Rg	Rf 97.7 Rg 100.4
Lifetime (TM21)	L90 B5 50,000hrs (inc driver)
Lifetime (Calculated)	L70 426,000hrs
DRIVER	
Protocols	Mains Dim / DALI / 0-10V / Non-dim
Dim to Dark	0.1% Lux
Distance from LED	20m / 65' (series wiring)
Emergency	Emergency packs available

28/03/24

SPECIFICATION CODE

Engine type	Bezel	Colour Temp	Driver	Beam Width	Bezel Colour	Baffle Colour	Options
NL	**DIR**	**27**	**M**	**S**	**W**	**BB**	**F 54 E**
		27 / 2700K 30 / 3000K 40 / 4000K	**M / Mains Dim** D / DALI 0 / 0-10v N / Non Dim X / No Driver	U / Ultra **S / Spot** N / Narrow M / Medium W / Wide F / Flood H / Wash C / Crisp L / Elliptical Linear O / Elliptical Oval	**W / White RAL 9010** D / White RAL 9003 B / Black RAL 9005 C / Other RAL V / Dark Bronze* T / Medium Bronze* R / Light Bronze* Y / Burnished Brass* G / Polished Brass K / Brushed Chrome L / Polished Chrome Z / Other Metallic	WB / White RAL 9010 DB / White RAL 9003 **BB / Black RAL 9005** CB / Other RAL VB / Dark Bronze TB / Medium Bronze RB / Light Bronze YB / Burnished Brass GB / Polished Brass KB / Brushed Chrome LB / Polished Chrome ZB / Other Metallic	**F / 60 min Fire Rated Plate** **54 / IP54** 65 / IP65 P / Sea & Spa IP65 C / Constant Torsion*1 T / Lockable Tilt & Rotate J / Plaster-In Plate **E / 3hr Emergency** H / Honeycomb N / Frosted Lens Z / LSZH Cable K / Click Connector F- / 60 min Fire Rated Hood

* - Fire Rated Hood must be used with Dark Bronze, Medium Bronze, Light Bronze and Burnished Brass Bezels

*1 - NOTE: Fire Hood if used with constant torsion springs.

ORLUNA LED Technologies Limited,
Unit C, Holly Industrial Park,
Ryan Way, Watford,
Hertfordshire WD24 4YP
United Kingdom

info@orluna.com

+44 (0) 1923 889 712

orluna