
orluna

muro
origin natural




muro
origin natural

circular product

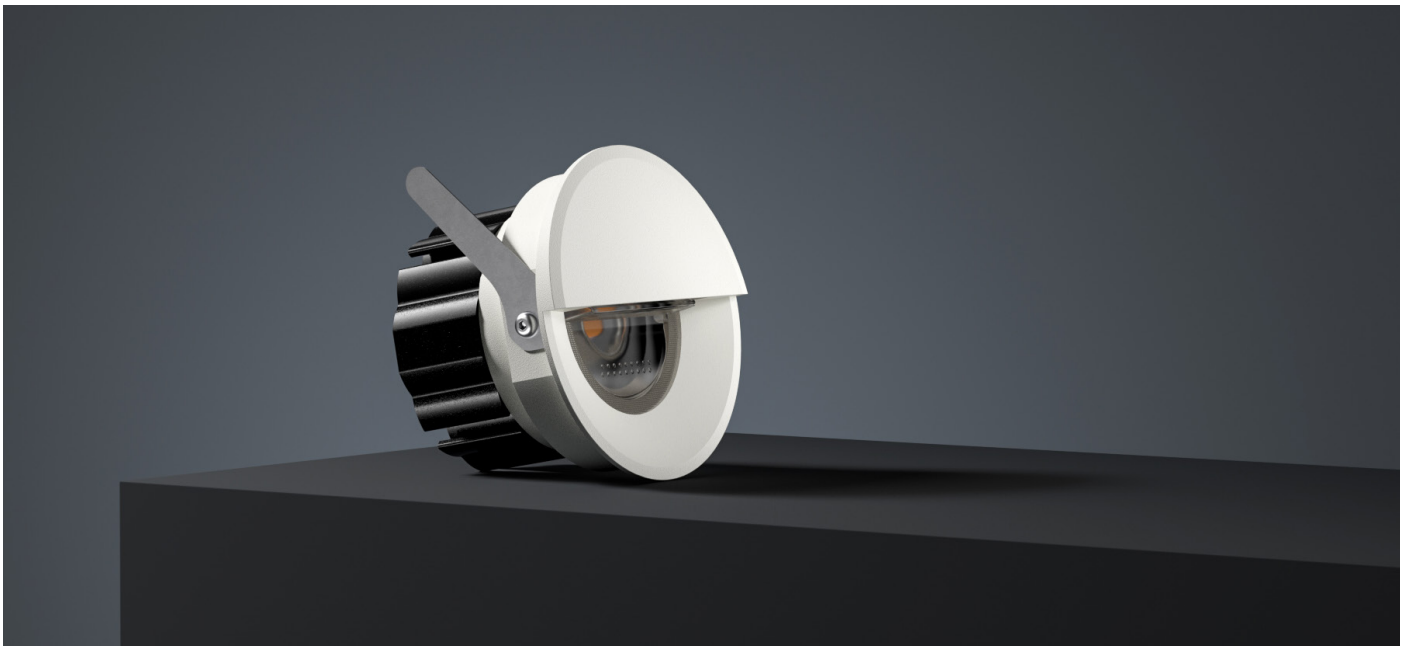





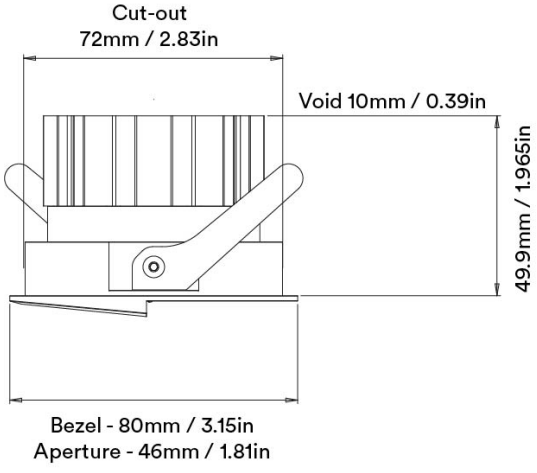

ORLUNA LED Technologies Limited,
Unit C, Holly Industrial Park,
Ryan Way, Watford,
Hertfordshire WD24 4YP
United Kingdom


info@orluna.com

+44 (0) 1923 889 712


orluna

muro
origin natural

circular product

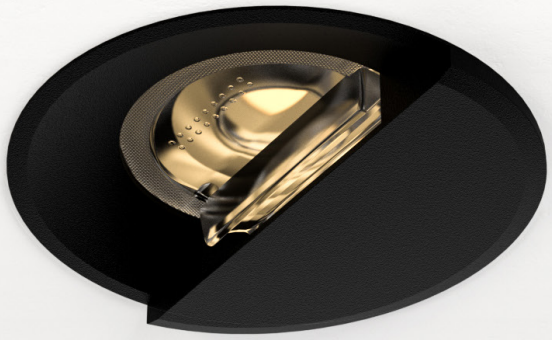

muro spacing guide

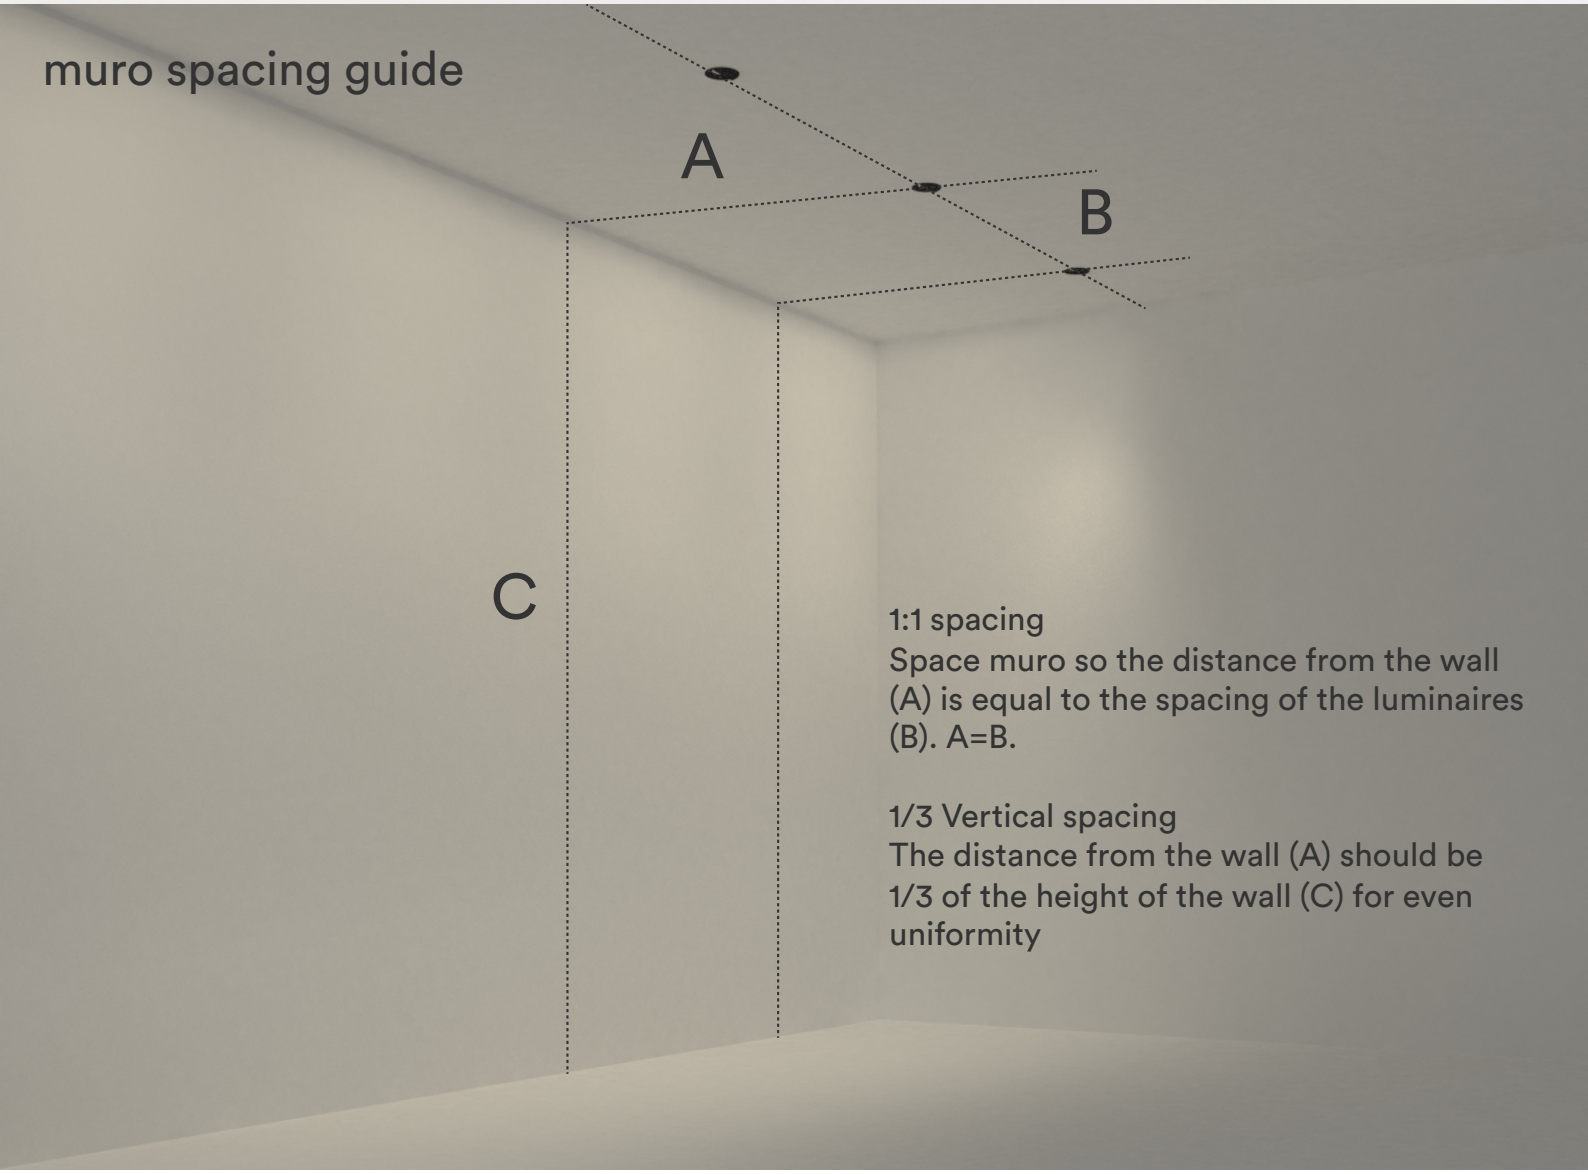

1:1 spacing
Space muro so the distance from the wall (A) is equal to the spacing of the luminaires (B). A=B.

1/3 Vertical spacing
The distance from the wall (A) should be 1/3 of the height of the wall (C) for even uniformity

ORLUNA LED Technologies Limited,
Unit C, Holly Industrial Park,
Ryan Way, Watford,
Hertfordshire WD24 4YP
United Kingdom

info@orluna.com

+44 (0) 1923 889 712

orluna

muro
origin natural

circular product

1 When an old Orluna light comes to the end of its life, or is faulty, instead of throwing it away, we kindly ask you to return it to us.

2 Once we've received the unwanted or faulty fitting, it's dismantled, repaired and renewed with a new LED and PCB.

3 The fully repaired and tested product enters back into our stock –with a brand new warranty.

4 The 'new' light fitting is despatched to a new customer.







ORLUNA LED Technologies Limited,
Unit C, Holly Industrial Park,
Ryan Way, Watford,
Hertfordshire WD24 4YP
United Kingdom

info@orluna.com

+44 (0) 1923 889 712

orluna

muro
origin natural

circular product

		2700K
		SPECIALITY
LIGHT VALUES	Beam Width FWHM	Wallwash Asymmetrical
	Initial Lumens	1021
	Engine Lumens	784
	Luminaire Lumens	784
	Engine Lm/W	69
	Luminiare Cd	760
POWER	Voltage	34V
	Drive Current	300mA
	Circuit Power (typ)	11.4W

		3000K
		SPECIALITY
LIGHT VALUES	Beam Width FWHM	Wallwash Asymmetrical
	Initial Lumens	1138
	Engine Lumens	838
	Luminaire Lumens	838
	Engine Lm/W	73
	Luminiare Cd	835
POWER	Voltage	34V
	Drive Current	300mA
	Circuit Power (typ)	11.4W

Binning SDCM (Hot)	2
CRI (typ)(R9)	98 (99)
TM30 Rf Rg	Rf 93.8 Rg 100.9
Lifetime (TM21)	L90 B5 50,000hrs (inc driver)
Lifetime (Calculated)	L70 426,000hrs
DRIVER Protocols	Mains Dim / DALI / 0-10V / Non-dim
Dim to Dark	0.1% Lux
Distance from LED	20m / 65' (series wiring)
Emergency	Emergency packs available

13/06/22

SPECIFICATION CODE

Engine type	Bezel	Colour Temp	Driver	Beam Width	Bezel Colour	Options
NL	MU	27	M	A	W	F 54 E
		27 / 2700K 30 / 3000K 40 / 4000K	**M / Mains Dim** D / DALI 0 / 0-10v N / Non Dim X / No Driver	**A / Asymmetrical**	**W / White RAL 9010** D / White RAL 9003 E / White RAL 9016 B / Black RAL 9005 C / Other RAL	**F / 60 min Fire Rated Plate** **54 / IP54** 65 / IP65 P / Sea & Spa IP65 *C / Constant Torsion J / Plaster-In Plate **E / 3hr Emergency** Z / LSZH Cable K / Click Connector

*NOTE: Fire Hood if used with constant torsion springs

ORLUNA LED Technologies Limited,
Unit C, Holly Industrial Park,
Ryan Way, Watford,
Hertfordshire WD24 4YP
United Kingdom

info@orluna.com

+44 (0) 1923 889 712

orluna