
UK/EU HEATH TABLE LAMP

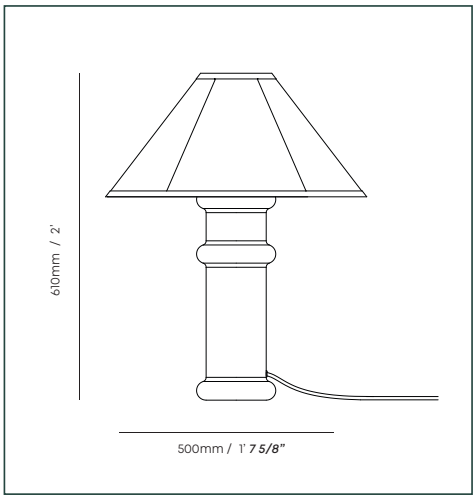

FIXTURE - PHYSICAL

Total dimension:	L 500mm x W 500mm x H 610mm
Lamp shade dimension:	L 500mm x W 500mm x H 240mm
Cable length:	3m
Materials:	High-gloss ceramic + Natural cotton
Weight:	1600g
Lamp shade weight:	400g
IP rating:	IP20 - Suitable for dry locations
Base:	E27

FIXTURE - ELECTRICAL

Power:	Max. 25W
Voltage:	220-240V
Frequency:	50/60Hz

Tala Energy Ltd. 25b Vyner Street,
London, E2 9DG, United Kingdom


Tala Europe B.V. Bertus Aafjeshove 40
Nieumwegein 3437 JN

tala.co.uk | hello@tala.co.uk | +44 7700 170343


GLOBE

6W | 540 lm | 2000-3000K
GLOB-6W-2000-3000K-E27-MP
Globe 6W 2000K to 3000K E27 Matte Porcelain LED Bulb





IES/LDT photometry files and product photography available on request



PHYSICAL

Bulb diameter:	60 mm
Bulb length:	108 mm
Glass shape:	A60
Base:	E27
Materials:	glass and nickel
Glass finish:	Matte White
Weight:	31g
Max. working temp.:	Max. 40°C
IP rating:	IP54

ELECTRICAL

Power:	6W
Current:	0.03 A
Voltage:	220-240V~ V
Frequency:	50/60Hz
Power factor:	0.9
Efficiency:	90 lm/W
Lifetime:	15000 hrs

ILLUMINATION

CCT:	2000-3000K
Lumens:	540 lm
Incandescent equiv.:	44W
Flicker:	<5%
Beam angle:	360°
Light source:	LED
CRI:	95Ra
R9:	65
TM30 - Rg	100
TM30 - Rf	90

DIMMING
Dimmable 0-100%
Recommended dimmer: Varilight V-Pro
(For a full list of recommended and compatible dimmers see website)

WARRANTY
2 years

EAN
5061046292137

Tala Energy Ltd. 25b Vyner Street,
London, E2 9DG, United Kingdom

Tala Europe B.V. Bertus Aafjeshove 40
Nieumwegein 3437 JN


tala.co.uk | hello@tala.co.uk | +44 7700 170343

Specification subject to change without notice. Refer to our website for the most recent product documentation. Tala designs in the EU/UK are protected by registered and or unregistered design rights


GLOBE

6W | 480 lm | 2200K
GLOB-6W-2200K-E27-NT
Globe 6W 2200K E27 Non-Tinted LED Bulb





IES/LDT photometry files
and product photography
available on request



PHYSICAL

Bulb diameter:	60 mm
Bulb length:	108 mm
Glass shape:	A60
Base:	E27
Materials:	glass and nickel
Glass finish:	Clear
Weight:	31g
Max. working temp.:	Max. 40°C
IP rating:	IP54

ELECTRICAL

Power:	6W
Current:	0.03 A
Voltage:	220-240V~ V
Frequency:	50/60Hz
Power factor:	0.9
Efficiency:	80 lm/W
Lifetime:	30000 hrs

ILLUMINATION

CCT:	2200K
Lumens:	480 lm
Incandescent equiv.:	41W
Flicker:	<5%
Beam angle:	360°
Light source:	LED
CRI:	95Ra
R9:	90
TM30 - Rg	100
TM30 - Rf	90

DIMMING

Dimmable 0-100%
Recommended dimmer: Varilight V-Pro
(For a full list of recommended and compatible dimmers see website)

WARRANTY

2 years

EAN

5061046291956

Tala Energy Ltd. 25b Vyner Street,
London, E2 9DG, United Kingdom

Tala Europe B.V. Bertus Aafjeshove 40
Nieumwegein 3437 JN


tala.co.uk | hello@tala.co.uk | +44 7700 170343

Specification subject to change without notice. Refer to our website for the most recent product documentation. Tala designs in the EU/UK are protected by registered and or unregistered design rights


GLOBE

6W | 600 lm | 2700K
GLOB-6W-2700K-E27-NT
Globe 6W 2700K E27 Non-Tinted LED Bulb





IES/LDT photometry files and product photography available on request



PHYSICAL

Bulb diameter:	60 mm
Bulb length:	108 mm
Glass shape:	A60
Base:	E27
Materials:	glass and nickel
Glass finish:	Clear
Weight:	31g
Max. working temp.:	Max. 40°C
IP rating:	IP54

ELECTRICAL

Power:	6W
Current:	0.03 A
Voltage:	220-240V~ V
Frequency:	50/60Hz
Power factor:	0.9
Efficiency:	100 lm/W
Lifetime:	30000 hrs

ILLUMINATION

CCT:	2700K
Lumens:	600 lm
Incandescent equiv.:	48W
Flicker:	<5%
Beam angle:	360°
Light source:	LED
CRI:	95Ra
R9:	70
TM30 - Rg	100
TM30 - Rf	90

DIMMING

Dimmable 0-100%
Recommended dimmer: Varilight V-Pro
(For a full list of recommended and compatible dimmers see website)

WARRANTY

2 years

EAN

5061046291949

Tala Energy Ltd. 25b Vyner Street, London, E2 9DG, United Kingdom

Tala Europe B.V. Bertus Aafjeshove 40 Nieumwegein 3437 JN


tala.co.uk | hello@tala.co.uk | +44 7700 170343

Specification subject to change without notice. Refer to our website for the most recent product documentation. Tala designs in the EU/UK are protected by registered and or unregistered design rights


UK/EU GLOBE

6W | 620 lm | 3000K
GLOB-6W-3000K-E27-NT





IES/LDT photometry files and product photography available on request



PHYSICAL

Bulb dimension:	60mm
Bulb length:	108mm
Glass shape:	A60
Base:	E27
Materials:	Glass & nickel
Glass finish:	Clear
Weight:	31g
Max. working temp.:	Max. 40°C
IP rating:	IP54

ELECTRICAL

Power:	6W
Current:	0.03 A
Voltage:	220-240V~
Frequency:	50/60Hz
Power factor	0.9
Efficiency:	103 lm/W
Lifetime:	30,000 hrs

ILLUMINATION

CCT:	3000K
Lumens:	620 lm
Incandescent equiv.:	50 W
Flicker:	<5%
Beam angle:	360°
Light source:	LED
CRI:	95Ra
R9:	75
TM30 - Rg	95
TM30 - Rf	85

DIMMING

Dimmable 0-100%
Recommended dimmer: Tala Rotary Wall Dimmer
(For a full list of recommended and compatible dimmers see website)

Tala Energy Ltd. 25b Vyner Street,
London, E2 9DG, United Kingdom

Tala Europe B.V. Bertus Aafjeshove 40
Nieumwegein 3437 JN

tala.co.uk | hello@tala.co.uk | +44 7700 170343724-8111

WARRANTY

2 years

EAN

5061046299303

Specification subject to change without notice. Refer to our website for the most recent product documentation. Tala designs in the EU/UK are protected by registered and or unregistered design rights