

UK/EU KILTER 2.0 WALL LIGHT

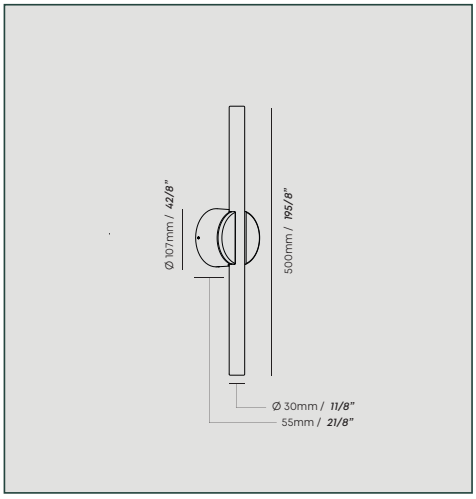

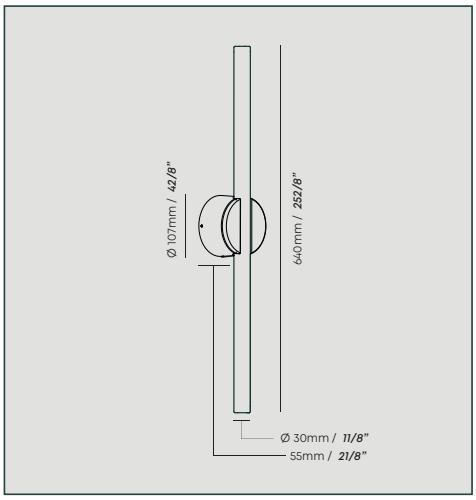

FIXTURE - PHYSICAL

Body + Face plate dimension: L 50mm x W 107mm x H 107mm
Base: S14d
IP Rating: IP 44

Body Finish:

- Dark Grey
- Brushed Brass
- White
- Brushed Stainless Steel

Face plate Finish:

- Dark Grey
- White
- Brushed Brass
- Polished Brass
- Brushed Stainless Steel
- Polished Stainless Steel

Body Weight:

Dark Grey	480g
White	480g
Brushed Brass	1200g
Brushed Stainless Steel	1000g

Face plate Weight:

Dark Grey	100g
White	100g
Brushed Brass	250g
Polished Brass	250g
Brushed Stainless Steel	160g
Polished Stainless Steel	160g

FIXTURE - ELECTRICAL

Power: 6W
Voltage: 220-240V~
Frequency: 50/60Hz
Current: 0.03A
Power factor: 0.9

Tala Energy Ltd. 25b Vyner Street,
London, E2 9DG, United Kingdom

Tala Europe B.V. Bertus Aafjeshove 40
Nieumwegein 3437 JN

tala.co.uk | hello@tala.co.uk | +44 7700 170343

KILTER I

6W | 375 lm | 2200K
T30-500-6W-2200K-S14D-FR
Kilter bulb 500mm length 6W 2200K S14D frosted 240V

The Kilter bulb by Tala is a new take on an architectural lighting staple. Defined by its tubular shape, Kilter achieves consistent light throw and reduce shadowed endpoints while offering Tala's signature dimming characteristics.



IES/LDT photometry files and product photography available on request

PHYSICAL

Bulb diameter:	30mm
Bulb length:	500mm
Glass shape:	T30
Base:	S14D
Materials:	Glass & nickel
Glass finish:	Frosted
Weight:	185g
Max. working temp.:	-5°C to 40°C
IP rating:	IP54

ELECTRICAL

Power:	6W
Current:	0.03A
Voltage:	220-240V~
Frequency:	50/60Hz
Power factor:	0.9
Efficiency:	63
Lifetime:	15,000 hrs

ILLUMINATION

CCT:	2200K
Lumens:	375 lm
Incandescent equiv.:	32W
Flicker:	<5%
Beam angle:	360°
Light source:	LED
CRI:	95Ra
R9:	75
TM30 - Rg	97
TM30 - Rf	94

DIMMING

Dimmable 0-100%
Recommended dimmer: Varilight V-Pro
(For a full list of recommended and compatible dimmers see website)

LOGISTICAL

Unit Packaging
PC/Ctn: 1
Gross weight: 350g
L 560 x W 70 x H 70mm

Outer Carton
PC/Ctn: 4
Gross weight: 1.7kg
L 565 x W 290 x H 75cm

WARRANTY

2 years

EAN

5060915712080

Tala Energy Ltd. 25b Vyner Street,
London, E2 9DG, United Kingdom

Tala Europe B.V. Bertus Aafjeshove 40
Nieumwegein 3437 JN

tala.co.uk | hello@tala.co.uk | +44 7700 170343

Specification subject to change without notice. Refer to our website for the most recent product documentation. Tala designs in the EU/UK are protected by registered and or unregistered design rights

KILTER I

6W | 375 lm | 2700K
T30-500-6W-2700K-S14D-FR
Kilter bulb 500mm length 6W 2700K S14D frosted 240V

The Kilter bulb by Tala is a new take on an architectural lighting staple. Defined by its tubular shape, Kilter achieves consistent light throw and reduce shadowed endpoints while offering Tala's signature dimming characteristics.



IES/LDT photometry files and product photography available on request

PHYSICAL

Bulb diameter:	30mm
Bulb length:	500mm
Glass shape:	T30
Base:	S14D
Materials:	Glass & nickel
Glass finish:	Frosted
Weight:	185g
Max. working temp.:	-5°C to 40°C
IP rating:	IP54

ELECTRICAL

Power:	6W
Current:	0.03A
Voltage:	220-240V~
Frequency:	50/60Hz
Power factor:	0.9
Efficiency:	63
Lifetime:	15,000 hrs

ILLUMINATION

CCT:	2700K
Lumens:	375 lm
Incandescent equiv.:	32W
Flicker:	<5%
Beam angle:	360°
Light source:	LED
CRI:	95Ra
R9:	75
TM30 - Rg	95
TM30 - Rf	92

DIMMING

Dimmable 0-100%
Recommended dimmer: Varilight V-Pro
(For a full list of recommended and compatible dimmers see website)

LOGISTICAL

Unit Packaging
PC/Ctn: 1
Gross weight: 350g
L 560 x W 70 x H 70mm

Outer Carton
PC/Ctn: 4
Gross weight: 1.7kg
L 565 x W 290 x H 75cm

WARRANTY

2 years

EAN

5060915712103

Tala Energy Ltd. 25b Vyner Street,
London, E2 9DG, United Kingdom

Tala Europe B.V. Bertus Aafjeshove 40
Nieumwegein 3437 JN

tala.co.uk | hello@tala.co.uk | +44 7700 170343

Specification subject to change without notice. Refer to our website for the most recent product documentation. Tala designs in the EU/UK are protected by registered and or unregistered design rights

KILTER II

6W | 375 lm | 2200K
T30-640-6W-2200K-S14D-FR
Kilter bulb 640mm length 6W 2200K S14D frosted 240V

The Kilter bulb by Tala is a new take on an architectural lighting staple. Defined by its tubular shape, Kilter achieves consistent light throw and reduce shadowed endpoints while offering Tala's signature dimming characteristics.



IES/LDT photometry files and product photography available on request

PHYSICAL

Bulb diameter:	30mm
Bulb length:	640mm
Glass shape:	T30
Base:	S14D
Materials:	Glass & nickel
Glass finish:	Frosted
Weight:	195g
Max. working temp.:	-5°C to 40°C
IP rating:	IP54

ELECTRICAL

Power:	6W
Current:	0.03A
Voltage:	220-240V~
Frequency:	50/60Hz
Power factor:	0.9
Efficiency:	63
Lifetime:	15,000 hrs

ILLUMINATION

CCT:	2200K
Lumens:	375 lm
Incandescent equiv.:	32W
Flicker:	<5%
Beam angle:	360°
Light source:	LED
CRI:	95Ra
R9:	75
TM30 - Rg	97
TM30 - Rf	94

DIMMING

Dimmable 0-100%
Recommended dimmer: Varilight V-Pro
(For a full list of recommended and compatible dimmers see website)

LOGISTICAL

Unit Packaging
PC/Ctn: 1
Gross weight: 600g
L 700 x W 70 x H 70mm

Outer Carton
PC/Ctn: 4
Gross weight: 1.9kg
L 705 x W 290 x H 75cm

WARRANTY

2 years

EAN

5060915712097

Tala Energy Ltd. 25b Vyner Street,
London, E2 9DG, United Kingdom

Tala Europe B.V. Bertus Aafjeshove 40
Nieumwegein 3437 JN

tala.co.uk | hello@tala.co.uk | +44 7700 170343

Specification subject to change without notice. Refer to our website for the most recent product documentation. Tala designs in the EU/UK are protected by registered and or unregistered design rights

KILTER II

6W | 375 lm | 2700K
T30-640-6W-2700K-S14D-FR
Kilter bulb 640mm length 6W 2700K S14D frosted 240V

The Kilter bulb by Tala is a new take on an architectural lighting staple. Defined by its tubular shape, Kilter achieves consistent light throw and reduce shadowed endpoints while offering Tala's signature dimming characteristics.



IES/LDT photometry files and product photography available on request

PHYSICAL

Bulb diameter:	30mm
Bulb length:	640mm
Glass shape:	T30
Base:	S14D
Materials:	Glass & nickel
Glass finish:	Frosted
Weight:	195g
Max. working temp.:	-5°C to 40°C
IP rating:	IP54

ELECTRICAL

Power:	6W
Current:	0.03A
Voltage:	220-240V~
Frequency:	50/60Hz
Power factor:	0.9
Efficiency:	63
Lifetime:	15,000 hrs

ILLUMINATION

CCT:	2700K
Lumens:	375 lm
Incandescent equiv.:	32W
Flicker:	<5%
Beam angle:	360°
Light source:	LED
CRI:	95Ra
R9:	75
TM30 - Rg	95
TM30 - Rf	92

DIMMING

Dimmable 0-100%
Recommended dimmer: Varilight V-Pro
(For a full list of recommended and compatible dimmers see website)

LOGISTICAL

Unit Packaging
PC/Ctn: 1
Gross weight: 600g
L 700 x W 70 x H 70mm

Outer Carton
PC/Ctn: 4
Gross weight: 1.9kg
L 705 x W 290 x H 75cm

WARRANTY

2 years

EAN

5060915712110

Tala Energy Ltd. 25b Vyner Street,
London, E2 9DG, United Kingdom

Tala Europe B.V. Bertus Aafjeshove 40
Nieumwegein 3437 JN

tala.co.uk | hello@tala.co.uk | +44 7700 170343

Specification subject to change without notice. Refer to our website for the most recent product documentation. Tala designs in the EU/UK are protected by registered and or unregistered design rights